



PRODUCT DATA SHEET

STAIR NOSINGS ACCLIMITE CARBORUNDUM



DESCRIPTION

- 75mm x 30mm x 4.5mm
- Anodised aluminium with carborundum insert
- Comprehensive colour range of anti-slip silicon carbide inserts
- Concealed screw & glue fix for clean look
- 3.6m lengths

CODES

Clean Anodised Aluminium: **SN-ACG-C/XXX**
 Black Anodised Aluminium: **SN-ACG-BL/XXX**
 Brass Anodised Aluminium: **SN-ACG-BR/XXX**


WARRANTY

5 Years

SPECIFICATIONS

Slip Rating: P5

Luminance Contrast:	Black	LRV: Dry 5.0, Wet 3.24
	Grey	LRV: Dry 26.89, Wet 27.71
	Red	LRV: Dry 12.68, Wet 11.92
	Yellow	LRV: Dry 35.6, Wet 35.9

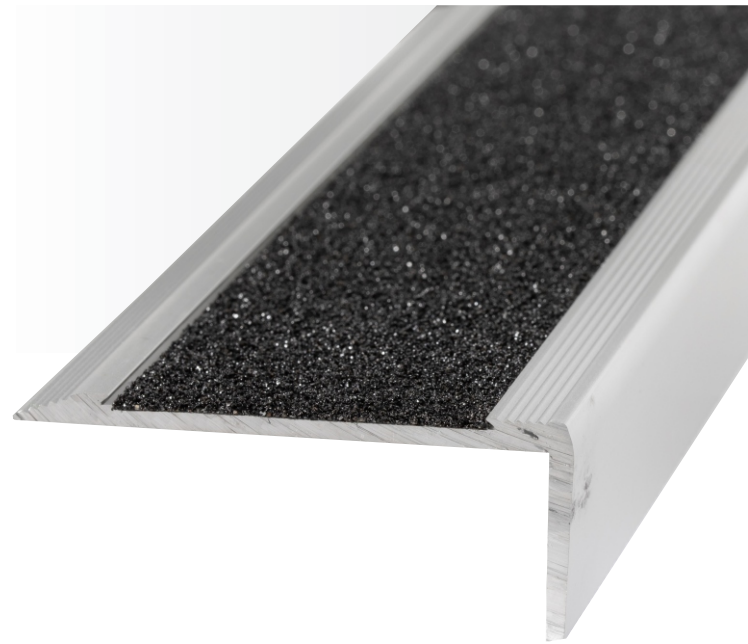

SUITABLE SUBSTRATES

Natural Stone (Granite, Marble Sandstone, Slate, Blue Stone, Basalt & more)
 Engineering Stone (Caesar Stone, Quantum Stone & more)
 Concrete, Asphalt
 Timber/Rubber Vinyl Flooring
 Ceramic

COLOURS


ALUMINIUM:



INSERT:



PROFILE

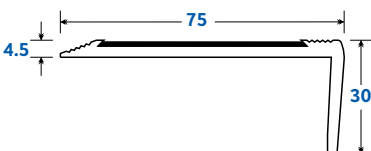

HOW TO SPECIFY

Copy the prewritten specification below and update all sections in brackets to create your project specification.

Description

Sterling Supplies Acclimite Carborundum Nosing in (specify colour) anodised aluminium with (specify colour) insert, code (specify code)

Manufacturer

Sterling Supplies
 P: 1800 621 103
 E: sales@sterlingsupplies.com.au
 W: www.sterlingsupplies.com.au

Example - Typical Specification

Sterling Supplies Acclimite Carborundum Nosing in CLEAR anodised aluminium with BLACK insert, code SN-ACG-C/BLK. To be installed in accordance to the manufacturer's instructions in accordance to the AS/NZS 1248.1.4.2009.

