




# STERLING SUPPLIES

## PRODUCT DATA SHEET

Stair Nosings

### Appular Carborundum

- Anodised aluminium with carborundum insert.
- Comprehensive colour range of anti-slip silicon carbide inserts.
- Suitable for flat even surfaces, such as concrete, tiles and timber.
- Also available as an Instant Adhesive, no drilling required.
- Complies to AS/NZS 1428.1-2009.

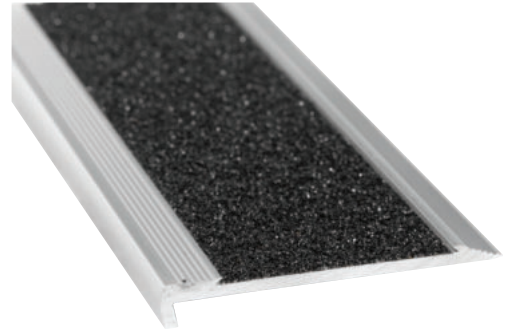

Insert Colours	Clear Anodised	Black Anodised	Brass Anodised	Luminance Contrast
Black	SN-APG-C/BLK	SN-APG-BL/BLK	SN-APG-BR/BLK	LRV: Dry 2.959, Wet 1.972
Grey	SN-APG-C/GRY	SN-APG-BL/GRY	SN-APG-BR/GRY	LRV: Dry 15.474, Wet 15.475
Yellow	SN-APG-C/YLW	SN-APG-BL/YLW	SN-APG-BR/YLW	LRV: Dry 74.151, Wet 73.081
White	SN-APG-C/WHI	SN-APG-BL/WHI	SN-APG-BR/WHI	LRV: Dry 40.717, Wet 40.070

**Size** 75mm x 10mm x 4.5mm Lengths: 4.1m

**Slip Rating** P5

#### Colours

##### ALUMINIUM COLOURS



CLEAR ANODISED



BLACK ANODISED



BRASS ANODISED

##### INSERT COLOURS



BLACK



GREY



YELLOW



WHITE

#### Applications

Education Institutions, Industrial Applications, Office Areas, Restaurants/Eating Establishments, Shopping Centres, Sports Facilities.

**P** 1800 621 103

**E** sales@sterlingsupplies.com.au

**W** www.sterlingsupplies.com.au

