




STERLING
SUPPLIES

PRODUCT DATA SHEET

Tactile Tiles / Plates

Duratac® Hazard Tiles

- High quality UV stable polymer with self-adhesive backing.
- Excellent durability and virtually no maintenance.
- Bevelled edges to minimise tripping hazards.
- Suitable for interior and exterior applications.
- Box of 25.
- Complies to AS/NZS 1428.4.1-2009.
- 11 units per square meter

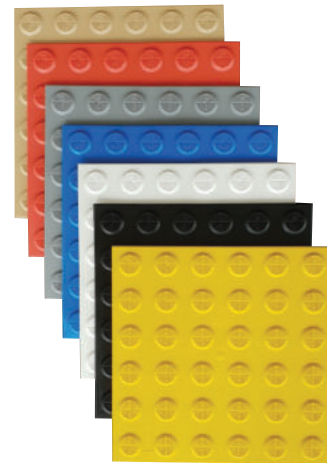

Colours	Code	Size	Specifications
Beige - LRV: Dry 38.42, Wet 37.96	TGSI-HF3030/BEI-DT	300mm Long x 300mm Wide x 5mm High	Slip Rating: P4 Required Minimum Contrast 30% SUITABLE SUBSTRATES Natural Stone (Granite, Marble Sandstone, Slate, Blue Stone, Basalt & more) Engineering Stone (Caesar Stone, Quantum Stone & more) Concrete, Asphalt (requires priming.) Timber/Rubber Vinyl Flooring. Ceramic.
Black - LRV: Dry 3.34, Wet 3.16	TGSI-HF3030/BLK-DT		
Blue - LRV: Dry 10.13, Wet 9.80	TGSI-HF3030/BLU-DT		
Grey - LRV: Dry 21.77, Wet 21.84	TGSI-HF3030/GRY-DT		
Red - LRV: 14.45, Wet 14.08	TGSI-HF3030/RED-DT		
White - LRV: Dry 83.93, Wet 83.46	TGSI-HF3030/WHI-DT		
Yellow - LRV: Dry 48.95, Wet 48.62	TGSI-HF3030/YLW-DT		

Applications

Education Institutions, Industrial Applications, Office Areas, Restaurants/Eating Establishments, Shopping Centres, Sports Facilities.

P 1800 621 103

E sales@sterlingsupplies.com.au

W www.sterlingsupplies.com.au

