




STERLING
SUPPLIES

PRODUCT DATA SHEET

Specialized Mat Studded Rubber

An economical rubber runner with a coined top surface suitable for a variety of applications.

- Good quality rubber compound.
- Patterned surface provides anti-slip surface.
- Easily cut to shape with a knife.

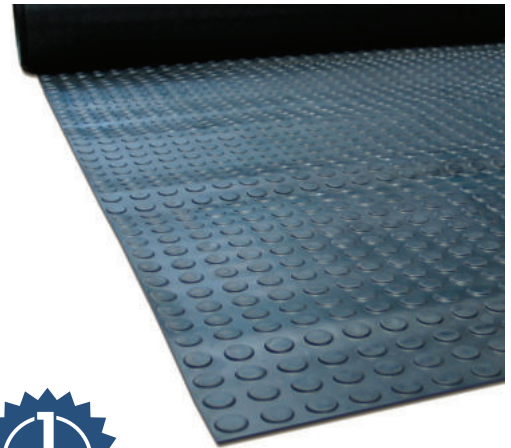

Code	Size & Thickness	Installation Note
6481201000	120cm x 10m	Ensure the recess is clean and free of debris. Use Sikabond 105 Contact Fix and spread evenly over both surfaces either by sprayer or trowel. Cut and lay out strips of the matting to suit the area. Place the Studded Rubber on top of the adhesive and apply pressure with a vinyl roller (or similar) to ensure adhesion.
	120cm cut to length	
	Thickness: 3.5 mm	

Colours



BLACK

Applications Manufacturing, Educational Institutions, Ramps

