





STERLING SUPPLIES

PRODUCT DATA SHEET

Stair Nosings

Appular Carborundum Flat

- Anodised aluminium with carborundum insert.
- Comprehensive colour range of anti-slip silicon carbide inserts.
- Glue fixed only.
- Ideal for fire stairs.
- Also available as an Instant Adhesive, no drilling required.
- Complies to AS 1428.1:2021.

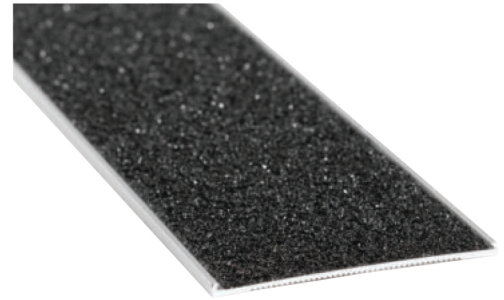

Insert Colours	Clear Anodised	Black Anodised	Brass Anodised	Luminance Contrast
Black	SN-APGF-C/BLK	SN-APGF-BL/BLK	SN-APGF-BR/BLK	LRV: Dry 2.959, Wet 1.972
Grey	SN-APGF-C/GRY	SN-APGF-BL/GRY	SN-APGF-BR/GRY	LRV: Dry 15.474, Wet 15.475
Yellow	SN-APGF-C/YLW	SN-APGF-BL/YLW	SN-APGF-BR/YLW	LRV: Dry 74.151, Wet 73.081
White	SN-APGF-C/WHI	SN-APGF-BL/WHI	SN-APGF-BR/WHI	LRV: Dry 40.717, Wet 40.070

Size 50mm x 2.5mm Lengths: 4.1m

Slip Rating P5

Colours

ALUMINIUM COLOURS

CLEAR ANODISED	BLACK ANODISED	BRASS ANODISED

INSERT COLOURS

BLACK	GREY	YELLOW	WHITE

Applications Education Institutions, Industrial Applications, Office Areas, Restaurants/Eating Establishments, Shopping Centres, Sports Facilities.

