




## PRODUCT DATA SHEET

### Stair Nosings

#### Appular Carborundum

- Anodised aluminium with carborundum insert.
- Comprehensive colour range of anti-slip silicon carbide inserts.
- Suitable for flat even surfaces, such as concrete, tiles and timber.
- Also available as an Instant Adhesive, no drilling required.
- Complies to AS 1428.1:2021.

**We strongly recommend the use of our Icons Allrounder Adhesive when installing this Stair Nosing to maintain warranty eligibility.**

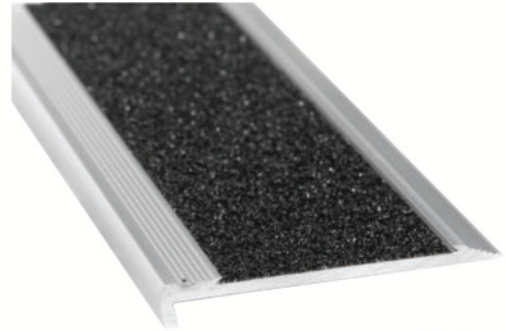

Insert Colours	Clear Anodised	Black Anodised	Brass Anodised	Luminance Contrast
Black	SN-APG-C/BLK	SN-APG-BL/BLK	SN-APG-BR/BLK	LRV: Dry 2.959, Wet 1.972
Grey	SN-APG-C/GRY	SN-APG-BL/GRY	SN-APG-BR/GRY	LRV: Dry 15.474, Wet 15.475
Yellow	SN-APG-C/YLW	SN-APG-BL/YLW	SN-APG-BR/YLW	LRV: Dry 74.180, Wet 73.081
White	SN-APG-C/WHI	SN-APG-BL/WHI	SN-APG-BR/WHI	LRV: Dry 40.700, Wet 40.070

**Size** 75mm x 10mm x 4.5mm Lengths: 4.1m

**Slip Rating** P5

#### Colours

##### ALUMINIUM COLOURS



##### INSERT COLOURS



#### Applications

Education Institutions, Industrial Applications, Office Areas, Restaurants/Eating Establishments, Shopping Centres, Sports Facilities.

