




PRODUCT DATA SHEET

Tactile Tiles / Plates Duratac® Hazard Tiles

- High quality UV stable polymer with self-adhesive backing.
- Excellent durability and virtually no maintenance.
- Bevelled edges to minimise tripping hazards.
- Suitable for interior and exterior applications.
- Box of 25.
- Complies to AS/NZS 1428.4.1:2021.
- 11 units per square meter

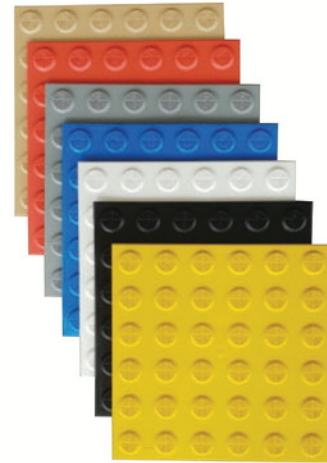

Colours	Code	Size	Specifications
Beige - LRV: Dry 38.420, Wet 37.959	TGSI-HF3030/BEI-DT	300mm Long x 300mm Wide x 5mm High	Slip Rating: P4 Required Minimum Contrast 30% SUITABLE SUBSTRATES Natural Stone (Granite, Marble Sandstone, Slate, Blue Stone, Basalt & more) Engineering Stone (Caesar Stone, Quantum Stone & more) Concrete, Asphalt (requires priming.) Timber/Rubber Vinyl Flooring. Ceramic.
Black - LRV: Dry 3.260, Wet 3.164	TGSI-HF3030/BLK-DT		
Blue - LRV: Dry 10.134, Wet 9.803	TGSI-HF3030/BLU-DT		
Grey - LRV: Dry 21.767, Wet 21.841	TGSI-HF3030/GRY-DT		
Red - LRV: Dry 14.45, Wet 14.08	TGSI-HF3030/RED-DT		
White - LRV: Dry 83.933, Wet 83.456	TGSI-HF3030/WHI-DT		
Yellow - LRV: Dry 48.95, Wet 48.615	GSI-HF3030/YLW-DT		

Applications

Education Institutions, Industrial Applications, Office Areas, Restaurants/Eating Establishments, Shopping Centres, Sports Facilities.

