




PRODUCT DATA SHEET

Tactile Tiles / Plates

Duratac® Stainless Steel Plate with Carborundum Insert

- High grade 316 stainless steel integrated tactile plate with silicon carbide inserts.
- Excellent durability and virtually no maintenance.
- Bevelled edges to minimise tripping hazards.
- Suitable for interior and exterior applications, ideal for surface mount.
- Complies to AS/NZS 1428.4.1:2021.
- 6 units per square meter

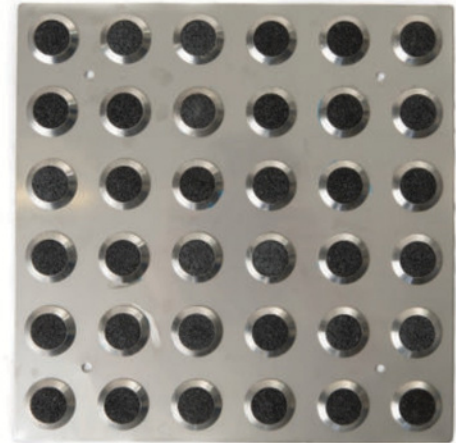

Specifications

| | |
|-------------|------------------------------------|
| Code | TGSI - 3030/SSGT |
| Size | 600mm Long x 300mm Wide x 5mm High |
| Slip Rating | P5 |



| | |
|--------------|--|
| Applications | Education Institutions, Industrial Applications, Office Areas, Restaurants/Eating Establishments, Shopping Centres, Sports Facilities. |
|--------------|--|

| | |
|--------------------|-------------------------|
| Luminance Contrast | LRV Dry 4.689, Wet 4.33 |
|--------------------|-------------------------|

| | |
|---------------------------|-----|
| Required Minimum Contrast | 60% |
|---------------------------|-----|

| | |
|---------------------|--|
| Suitable Substrates | Natural Stone (Granite, Marble Sandstone, Slate, Blue Stone, Basalt & more.) Engineering Stone (Caesar Stone, Quantum Stone & more.) Concrete, Asphalt (requires priming). Timber/Rubber Vinyl Flooring. Ceramic |
|---------------------|--|

