



STERLING
SUPPLIES



PRODUCT DATA SHEET

Stair Nosings

Transola

- High slip resistant fibreglass nosing.
- Surface mounted with extreme slip rating, ideal for industrial environments.
- Resistant to most chemicals.
- Can be adhered or screwed/riveted to surface.
- Ideal for external use.
- Also available as an Instant Adhesive, no drilling required.
- Complies to AS 1428.1:2021.

We strongly recommend the use of our Icons Allrounder Adhesive when installing this Stair Nosing to maintain warranty eligibility.

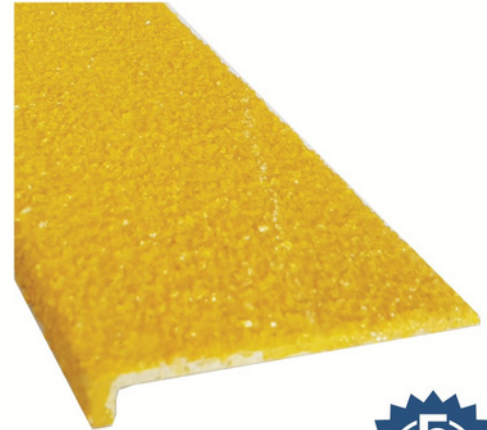

Insert Colours	Code	Luminance Contrast
Black	SN-TR10/BLK	LRV: Dry 7.6, Wet 6.6
Yellow	SN-TR10/YLW	LRV: Dry 36.8, Wet 39.5
	SN-TR30/BLK	
	SN-TR30/YLW	

Size
75mm x 10mm x 3mm
5mm x 30mm x 3mm
Lengths: 4.1 m

Slip Rating P5

Colours

FIBREGLASS COLOURS



YELLOW



BLACK (Available on request)

Applications Education Institutions, Industrial Applications, Office Areas, Restaurants/Eating Establishments, Shopping Centres, Sports Facilities.

P 1800 621 103

E sales@sterlingsupplies.com.au

W www.sterlingsupplies.com.au

